


12 VOLT SYSTEM

REQUIRED COMPONENTS	ENGINE APPLICABILITY
(1) BATTERY RACK (2) BATTERIES (2) POSITIVE CABLES (2) NEGATIVE CABLES	CUMMINS: ALL "CFP" MODELS CLARKE: ALL "JU4H" MODELS ALL "JU64" MODELS ALL "JW6H" MODELS EDWARDS: ALL MODELS

NOTES:

1. Clarke "VMFP," "JU4H" & "JU6H" Engines require cable sets of different lengths. On these engine models, a 2/0 gauge positive and negative cable set 60" (1524 mm) long, and a 3/0 gauge positive and negative cable set 80" (2032 mm) long are furnished.
2. Refer to Section 916, Page 251 for details of batteries, racks and cables.

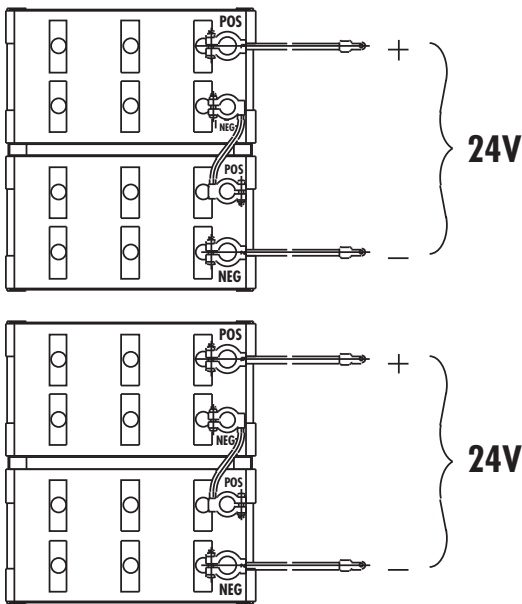

24 VOLT SYSTEM

REQUIRED COMPONENTS	ENGINE APPLICABILITY
(2) BATTERY RACKS (4) BATTERIES (2) POSITIVE CABLES (2) NEGATIVE CABLES (2) INTERCONNECTING CABLES	CLARKE: ALL "JX6H" MODELS CATERPILLAR: ALL MODELS